

DeltaFX™

DELTA FX™ APPLICATORS CAN HELP REDUCE DOWN TIME, IMPROVE PRODUCTIVITY AND INCREASE FLOOR SPACE IN THE LAMINATING STATION. DELTA FX™ HAS DIRECT GLUE PATHS WHICH ELIMINATE BLIND AND INACTIVE ADHESIVE PASSAGES.

PERFORMANCE


Continuously apply adhesives including PSA, APAO, and Reactive Hot Melts.

FLEXIBILITY

Quick-change pattern width(s) by adjusting distance between head and substrate.

INNOVATION

Single nozzle permits a range of pattern widths up to 12" (adhesive dependent).

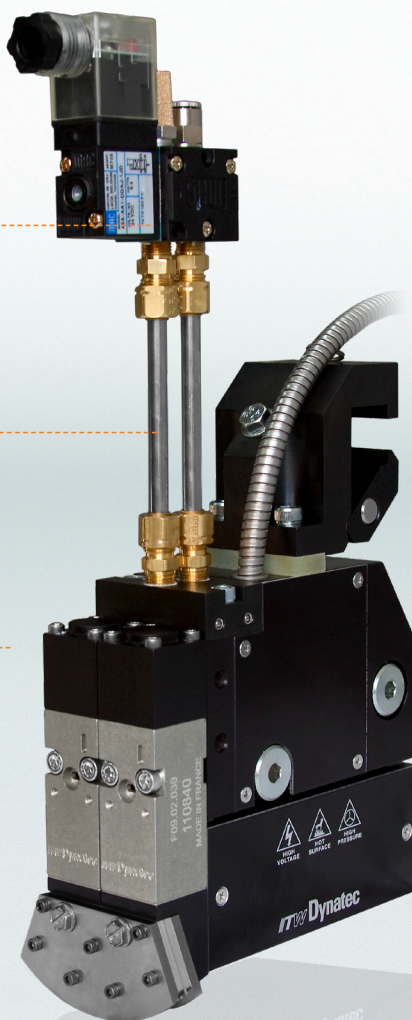

DELTA FX™ FIBERIZED SPRAY APPLICATOR

DeltaFx™ fiberized spray applicators provide exceptional value and flexibility for wide adhesive lamination. Using ITW Dynatec patented Laminated Plate Technology, DeltaFx™ provides a non-contact application system that is easy to use and maintain. DeltaFx™ applicators work with many types of hot melt adhesives, including PUR Hot Melts, and are an excellent choice when speed, versatility and durability are required.

FEATURES

- Consistent coat weight application eliminates ridges and valleys common when using swirl applicators.
- Random fiber patterns use less adhesive than spiral spray and maintain or improve bond strength.
- Adhesive pattern widths can be easily adjusted by adjusting the distance between the head and substrate.
- Minimizes clean-up and reduces downtime.

TECHNICAL DATA

Operating temperature range	40°C to 200°C (100°F to 400°F)
Warm-Up time	15 min. (cold start)
Wattage manifold	450W
Application air pressure range	0.8 - 1.5 bar (12-22 psi)
Typical air flow per nozzle	2,500 (nl/h) (1.5 SCFM)
Application width per nozzle	Up to 305 mm (12 in)
Wattage air heater	600W
Weight (including 2 modules, 1 nozzle and 1 solenoid valve)	3.8kg (8.3 lb.)
Height	261 mm (10.28 in)
Depth	146.3 mm (5.76 in)
Width	50 mm (1.97 in)

LOCATIONS

Americas

ITW Dynatec
31 Volunteers Drive
Hendersonville, TN 37075
Phone: +1.615.824.3634
Fax: +1.615.264.5248
dynatec@itwdynatec.com
www.itwdynatec.com

China

ITW Dynatec Suzhou
No.2 Anzhi Street
SIP, Suzhou, 215122, China
Phone +86.512.6289.0620
Fax +86.512.6289.0621
info@itwdynatec.cn
www.itwdynatec.cn

Japan

ITW Dynatec K.K
Flos Kamata
26-11, Nishikamata 7-chome
Ota-ku, Tokyo 144-0051, Japan
Phone: +81.3.5703.5501
Fax: +81.3.5703.5505
info@itwdynatec.co.jp
www.jp.itwdynatec.com

Europe, Middle East and Africa

ITW Dynatec GmbH
Industriestraße 28
40822 Mettmann, Germany
Phone: +49.2104.915.0
Fax: +49.2104.915.111
info@itwdynatec.de
www.itwdynatec.de

